



TPS107S-5W-POLY

5 W
Poly Crystalline Solar Module




	TPS107S-5W-POLY
	5W (+/-5%)
	oc)
Maximum Power Current(Imp)	0.26A
Maximum Power Voltage(Vmp)	19.08V

Certification

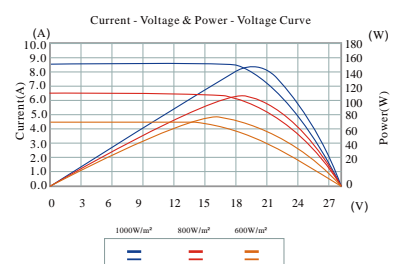

Not Your Average Solar Provider

Our Products Categories

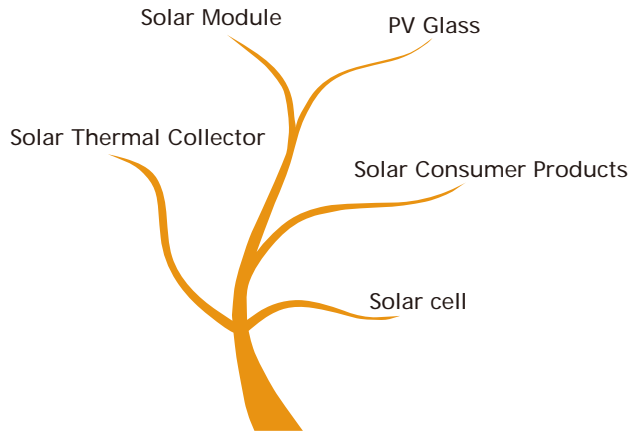

Professional Solar Provider Since 1992

Key Feature



3%

MECHANICAL SPECIFICATION

Cell Type	Poly crystalline 158.75*158.75mm
Number of cells	36pcs
Dimensions	360x260x18mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 1.0m






T

Not Your Average Solar Provider

Our Products Categories

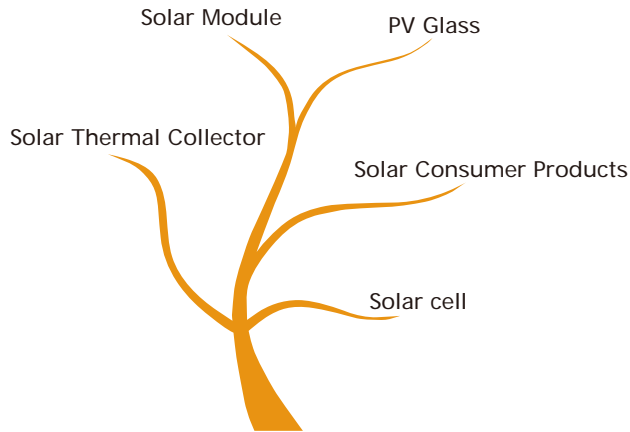

Professional Solar Provider Since 1992

Key Feature



3%

MECHANICAL SPECIFICATION

Cell Type	Poly crystalline 158.75*158.75mm
Number of cells	36pcs
Dimensions	680x775x25mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 0.9m


TOPRAY

TPS107S-210W-POLY 210W Poly Crystalline Solar Module



Not Your Average Solar Provider

Our Products Categories

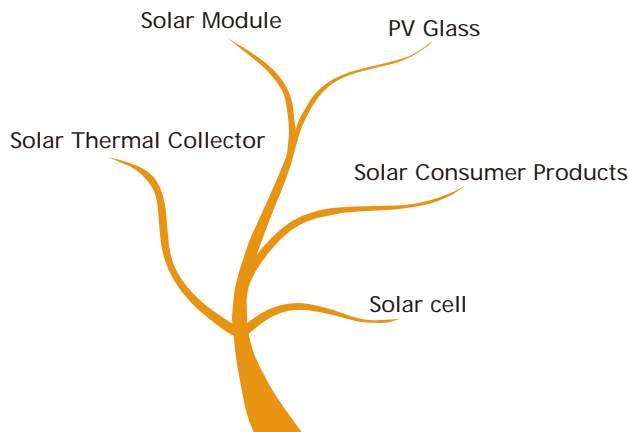

Professional Solar Provider Since 1992

Key Feature

- Plus power tolerance: +3%
- Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
- Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity


Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"
- 100% EL double-inspection ensures modules are defects free

Certification



Electrical Characteristics

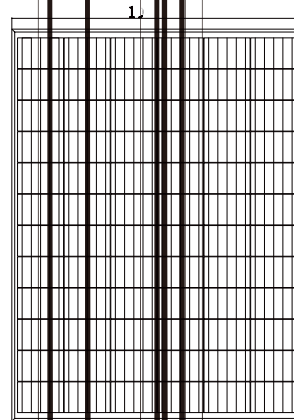

MECHANICAL SPECIFICATION


Cell Type	Poly crystalline 158.75*158.75mm
Number of cells	72pcs
Dimensions	1002x1352x35mm
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	Length 0.9m

PERFORMANCE AND STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module series	TPS107S-210W-POLY
Maximum Power at STC(Pmax)	210W (+/-5%)
Short Circuit Current(Isc)	5.94A
Open Circuit Voltage(Voc)	38.1V
Maximum Power Current(Imp)	5.51A
Maximum Power Voltage(Vmp)	38.1V

ABSOLUTE MAXIMUM LIMITS

Parameters	Unit	Rating
Operation temperature	°C	-40 to +85
Storage temperature	°C	-40 to +85

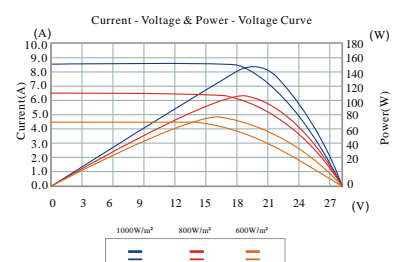

NOTE:READ SAFETY AND INSTALLATION INSTRUCTIONS OR CONTACT THE TECHNICAL SERVICE FOR FURTHER INFORMATION BEFORE USING THE PRODUCT.
© Mar 2013 Shenzhen Topray Solar Co.Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.